



SUSTAINABILITY AND DESIGN COMBINED

Manufactured from recycled PET bottles, FSC-certified wooden stands and connectors, FlexWall plays a key role in sustainability. With acoustically effective surface on both sides, the movable wall is ideal for use in open offices, noisy workplaces and wherever acoustics and design are required.



DIMENSIONS & SHAPES

FLEXWALL II:

The basic version is available in two sizes:
Dimensions: 1160 x 1600 / 1800 x 40 mm, R 100

FLEXWALL DESIGN:

For the individual design of the elements in any shape or with logos and lettering, we offer the following maximum size:

Dimensions: max. measurement 1160 x 2360 x 40 mm
Weight: 2600 g/m²



COLOUR & SURFACE


The acoustically highly effective SilentPET® panel has a grey base colour with a thermally treated surface.

COLOUR VARIATIONS:

Painted surface in RAL / NCS


STANDS AND CONNECTORS:

Wood: birch raw* / lacquering raw effect.
Steel: black lacquered* / lacquering according to RAL
*Standard

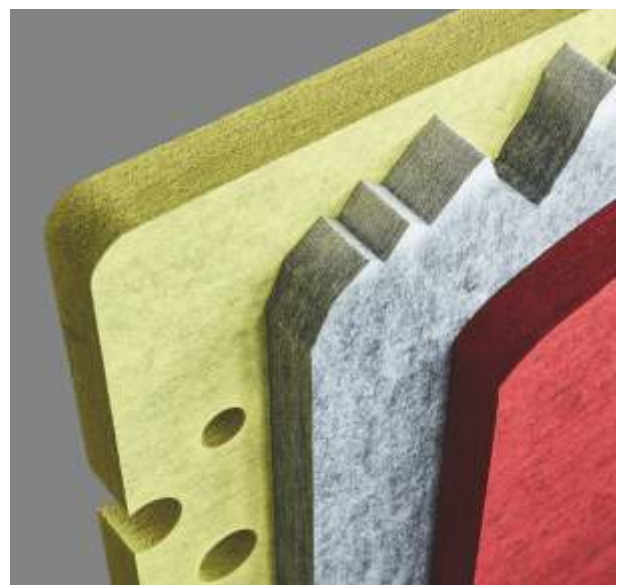

SOUND ABSORPTION

40 mm panel: sound absorption class C
 40 mm board: sound absorption coefficient α_w : 0.60
 SilentPET®-FlexWall: 1200 x 1800 x 40 mm, 2600 g/m²
 (test according to DIN EN ISO354 / DIN EN ISO11654)

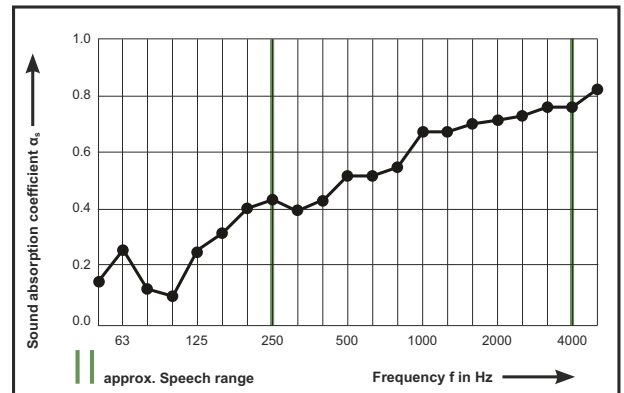

FIRE RESISTANCE & COMPOSITION

Temperature range: -30 °C to +80 °C
 Classification according to EN 13501-1, B-s1, d0
 60% PET recycled fibers,
 40% bico fibers (adhesive fibers),
 Surface thermally treated.




DELIVERY

The elements are delivered in packages of 2, well protected, incl. assembly accessories.

ASSEMBLY

Following the instructions provided, done in a few simple steps within minutes free-standing or set up in a row. The position can be changed at any time.

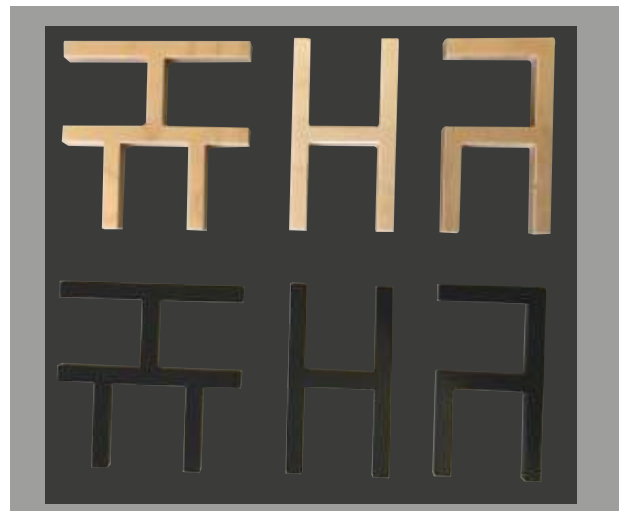

ADVANTAGES

- provides visual and acoustic separation
- increases concentration and privacy
- customized shapes and a wide range of colours
- does not emit any gases or other emissions
- dimensionally stable, does not need a frame
- fast and easy installation
- sustainably produced product

